


T Series Tubular Fittings

Features

- 316L Stainless Steel
- Sizes range from 1/4" to 2"
- Available in a variety of configurations




Concentric Reducings

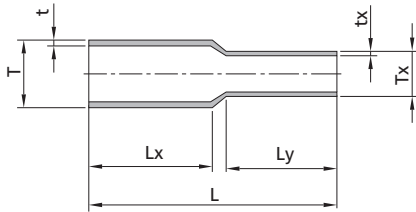


T-Tube O.D. (in.)	t-Wall Thickness (in.)	Tx-Tube O.D. (in.)	tx-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)			Working Pressure psig (bar)
					L	Lx	Ly	
3/8	0.035	1/4	0.035	6L-WU3-TB6-TB4	2.75 (69.9)	1.37 (34.8)	1.16 (29.5)	3330 (230)
1/2	0.049	1/4	0.035	6L-WU3-TB8-TB4	2.75 (69.9)	1.37 (34.8)	0.94 (23.9)	3530 (243)
1/2	0.049	3/8	0.035	6L-WU3-TB8-TB6	2.75 (69.9)	1.37 (34.8)	1.16 (29.5)	3330 (230)
3/4	0.065	1/4	0.035	6L-WU3-TB12-TB4	2.75 (69.9)	1.37 (34.8)	1.09 (27.7)	3330 (230)
3/4	0.065	3/8	0.035	6L-WU3-TB12-TB6	2.75 (69.9)	1.37 (34.8)	1.16 (29.5)	3330 (230)
3/4	0.065	1/2	0.049	6L-WU3-TB12-TB8	2.75 (69.9)	1.37 (34.8)	1.23 (31.2)	3330 (230)
1	0.065	1/4	0.035	6L-WU3-TB16-TB4	3.00 (76.2)	1.50 (38.1)	1.07 (27.2)	2420 (167)
1	0.065	3/8	0.035	6L-WU3-TB16-TB6	3.00 (76.2)	1.50 (38.1)	1.14 (29.0)	2420 (167)
1	0.065	1/2	0.049	6L-WU3-TB16-TB8	3.00 (76.2)	1.50 (38.1)	1.21 (30.7)	2420 (167)
1	0.065	3/4	0.065	6L-WU3-TB16-TB12	3.00 (76.2)	1.50 (38.1)	1.35 (34.3)	2420 (167)
1 1/2	0.065	1/4	0.035	6L-WU3-TB24-TB4	5.50 (140.0)	1.50 (38.1)	1.50 (38.1)	1550 (107)
1 1/2	0.065	3/8	0.035	6L-WU3-TB24-TB6	5.50 (140.0)	1.50 (38.1)	1.50 (38.1)	1550 (107)
1 1/2	0.065	1/2	0.049	6L-WU3-TB24-TB8	5.50 (140.0)	1.50 (38.1)	1.50 (38.1)	1550 (107)
1 1/2	0.065	3/4	0.065	6L-WU3-TB24-TB12	5.00 (127.0)	1.50 (38.1)	1.50 (38.1)	1550 (107)
1 1/2	0.065	1	0.065	6L-WU3-TB24-TB16	5.00 (127.0)	1.50 (38.1)	1.50 (38.1)	1160 (80)
2	0.065	1/4	0.035	6L-WU3-TB32-TB4	7.75 (197.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)
2	0.065	3/8	0.035	6L-WU3-TB32-TB6	7.75 (197.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)
2	0.065	1/2	0.049	6L-WU3-TB32-TB8	7.75 (197.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)
2	0.065	3/4	0.065	6L-WU3-TB32-TB12	7.25 (184.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)
2	0.065	1	0.065	6L-WU3-TB32-TB16	7.25 (184.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)
2	0.065	1 1/2	0.065	6L-WU3-TB32-TB24	5.25 (133.0)	1.75 (44.5)	1.50 (38.1)	1160 (80)

90° Elbows




T-Tube O.D. (in.)	t-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)		Working Pressure psig (bar)
			L	Lx	
1/4	0.035	6L-WL3-TB4	2.06 (52.3)	1.50 (38.1)	5150 (355)
3/8	0.035	6L-WL3-TB6	2.62 (66.5)	2.06 (52.3)	3330 (230)
1/2	0.049	6L-WL3-TB8	2.62 (66.5)	1.87 (47.5)	3530 (243)
3/4	0.065	6L-WL3-TB12	2.60 (66.0)	1.42 (36.0)	3330 (230)
1	0.065	6L-WL3-TB16	3.00 (76.2)	1.50 (38.1)	2420 (167)
1 1/2	0.065	6L-WL3-TB24	3.75 (95.3)	1.50 (38.1)	1550 (107)
2	0.065	6L-WL3-TB32	4.75 (120.7)	1.75 (44.5)	1160 (80)

45° Elbows

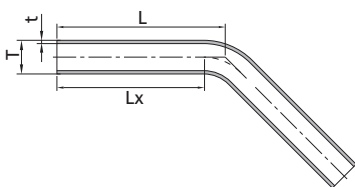


T-Tube O.D. (in.)	t-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)		Working Pressure psig (bar)
			L	Lx	
1/4	0.035	6L-WV3-TB4	1.10 (27.9)	0.86 (21.8)	5150 (355)
3/8	0.035	6L-WV3-TB6	2.00 (50.8)	1.76 (44.7)	3330 (230)
1/2	0.049	6L-WV3-TB8	2.50 (63.5)	2.18 (55.4)	3530 (243)
3/4	0.065	6L-WV3-TB12	1.93 (49.0)	1.46 (37.1)	3330 (230)
1	0.065	6L-WV3-TB16	2.25 (57.2)	1.63 (41.4)	2420 (167)
1 1/2	0.065	6L-WV3-TB24	2.50 (63.5)	1.50 (38.1)	1550 (107)
2	0.065	6L-WV3-TB32	3.00 (76.2)	1.75 (44.5)	1160 (80)

Tees




T-Tube O.D. (in.)	t-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)		Working Pressure psig (bar)
			L	Lx	
1/4	0.035	6L-WT3-TB4	3.54 (90.0)	1.77 (45.0)	5150 (355)
3/8	0.035	6L-WT3-TB6	3.54 (90.0)	1.77 (45.0)	3330 (230)
1/2	0.049	6L-WT3-TB8	3.54 (90.0)	1.77 (45.0)	3530 (243)
3/4	0.065	6L-WT3-TB12	4.09 (104.0)	2.05 (52.0)	3330 (230)
1	0.065	6L-WT3-TB16	4.33 (110.0)	2.17 (55.0)	2420 (167)
1 1/2	0.065	6L-WT3-TB24	5.83 (148.0)	2.91 (74.0)	1550 (107)
2	0.065	6L-WT3-TB32	6.06 (154.0)	3.07 (78.0)	1160 (80)

Reducing Tees



T-Tube O.D. (in.)	t-Wall Thickness (in.)	Tx-Tube O.D. (in.)	tx-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)		Working Pressure psig (bar)
					L	Lx	
3/8	0.035	1/4	0.035	6L-WT3-TB6-TB6-TB4	3.54 (90.0)	1.77 (45.0)	3330 (230)
1/2	0.049	1/4	0.035	6L-WT3-TB8-TB8-TB4	3.54 (90.0)	1.77 (45.0)	3530 (243)
1/2	0.049	3/8	0.035	6L-WT3-TB8-TB8-TB6	3.54 (90.0)	1.77 (45.0)	3330 (230)
3/4	0.065	1/4	0.035	6L-WT3-TB12-TB12-TB4	3.70 (94.0)	1.73 (44.0)	3330 (230)
3/4	0.065	3/8	0.035	6L-WT3-TB12-TB12-TB6	3.70 (94.0)	1.73 (44.0)	3330 (230)
3/4	0.065	1/2	0.049	6L-WT3-TB12-TB12-TB8	3.70 (94.0)	1.73 (44.0)	3330 (230)
1	0.065	1/4	0.035	6L-WT3-TB16-TB16-TB4	3.70 (94.0)	1.85 (47.0)	2420 (167)
1	0.065	3/8	0.035	6L-WT3-TB16-TB16-TB6	3.70 (94.0)	1.85 (47.0)	2420 (167)
1	0.065	1/2	0.049	6L-WT3-TB16-TB16-TB8	3.70 (94.0)	1.85 (47.0)	2420 (167)
1	0.065	3/4	0.065	6L-WT3-TB16-TB16-TB12	4.33 (110.0)	2.17 (55.0)	2420 (167)
1 1/2	0.065	1/4	0.035	6L-WT3-TB24-TB24-TB4	4.49 (114.0)	2.13 (54.0)	1550 (107)
1 1/2	0.065	3/8	0.035	6L-WT3-TB24-TB24-TB6	4.49 (114.0)	2.13 (54.0)	1550 (107)
1 1/2	0.065	1/2	0.049	6L-WT3-TB24-TB24-TB8	4.49 (114.0)	2.13 (54.0)	1550 (107)
1 1/2	0.065	3/4	0.065	6L-WT3-TB24-TB24-TB12	5.35 (136.0)	2.44 (62.0)	1550 (107)
1 1/2	0.065	1	0.065	6L-WT3-TB24-TB24-TB16	5.35 (136.0)	2.44 (62.0)	1550 (107)
2	0.065	1/4	0.035	6L-WT3-TB32-TB32-TB4	4.49 (114.0)	2.24 (57.0)	1160 (80)
2	0.065	3/8	0.035	6L-WT3-TB32-TB32-TB6	4.49 (114.0)	2.24 (57.0)	1160 (80)
2	0.065	1/2	0.049	6L-WT3-TB32-TB32-TB8	4.49 (114.0)	2.24 (57.0)	1160 (80)
2	0.065	3/4	0.065	6L-WT3-TB32-TB32-TB12	5.35 (136.0)	2.56 (65.0)	1160 (80)
2	0.065	1	0.065	6L-WT3-TB32-TB32-TB16	5.35 (136.0)	2.56 (65.0)	1160 (80)
2	0.065	1 1/2	0.065	6L-WT3-TB32-TB32-TB24	6.06 (154.0)	3.03 (77.0)	1160 (80)

End Caps



T-Tube O.D. (in.)	t-Wall Thickness (in.)	Ordering Number	Dimensions, in. (mm)	Working Pressure psig (bar)
			L	
1/4	0.035	6L-CW3-TB4	1.12 (28.4)	5150 (355)
3/8	0.035	6L-CW3-TB6	1.12 (28.4)	3330 (230)
1/2	0.049	6L-CW3-TB8	1.37 (34.8)	3530 (243)
3/4	0.065	6L-CW3-TB12	1.75 (44.5)	3330 (230)
1	0.065	6L-CW3-TB16	1.75 (44.5)	2420 (167)
1 1/2	0.065	6L-CW3-TB24	2.00 (50.8)	1550 (107)
2	0.065	6L-CW3-TB32	2.00 (50.8)	1160 (80)